

LITHIUM BATTERY

Primary lithium batteries CR26500

**3.0V Primary lithium-manganese dioxide
(Li-MnO₂) Power type
C -size spiral cell**

For high drain/high pulses applications requesting superior voltage response in -40°C~+60°C environments.

Cell size references (C)

Electrical characteristics

(typical values relative to cells stored for one year or less at +30°C max.)

Nominal capacity (at 25mA +20°C 2.0V cut off. The capacity resbred by the cell varies according to current drain, temperature and cut off).	5Ah
--	-----

Open circuit voltage (at +20°C)	3.0V
---------------------------------	------

Nominal voltage (at 25mA +20°C)	3.0V
---------------------------------	------

Pulse capability: Typically up to 2000 mA (2000 mA/0.1 second pulses, drained every 2 mn at +20°C from undischarged cells with 10 μA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell' s previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult pbq

Max. Continuous current	1000mA
Max. Pulse current	2000mA

Storage (recommended) (for more severe conditions, consult pbq)	+30°C max
--	-----------

Operating temperature range (Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult pbq)	40°C / +60°C
--	--------------

Physical characteristics

Diameter (max)	26.2mm(1.2 in)
----------------	----------------


Height (max)	50mm(2 in)
--------------	------------

Typical weight	55g(1.8oz)
----------------	------------

Available termination suffix	radial tabs, radial pins, axial leads, flying leads
------------------------------	---


LITHIUM BATTERY

CR26500

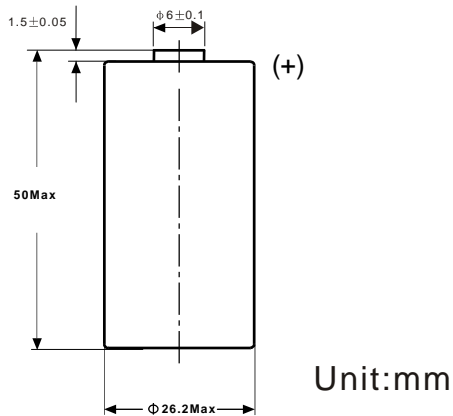

■ Characteristic curves

Discharge performance (25°C)

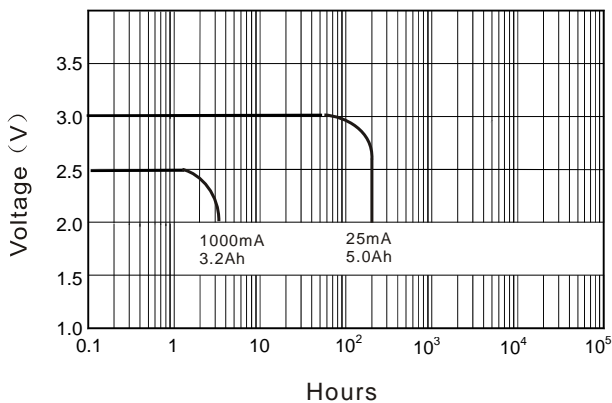

Nominal capacity 5.0Ah (25mA to 2.0V) .

Key features

- ▶ High and stable operating voltage
- ▶ Superior drain capability
- ▶ Low self-discharge rate (1 ~ 2% after 1year of storage at +20°C)
- ▶ Hermetic glass-to-metal sealing
- ▶ Notch technology for safety vent is recommended
- ▶ Non-flammable electrolyte

Main applications

- ▶ Radiocommunication and other military applications
- ▶ Alarms and security systems
- ▶ Beacons and emergency location transmitters
- ▶ GPS
- ▶ Metering systems
- ▶ Sonobuoys
- ▶ LED lighting applications
- ▶ Others

Storage

- ▶ The storage area should be clean, cool (not exceeding +30°C), dry and ventilated.

Warning

- ▶ Do not use if the battery casing was mangled.
- ▶ Don' t use different models of battery in series.
- ▶ Do not try to recharge.