

## LITHIUM BATTERY

### Primary lithium batteries CR17335SE

**3.0V Primary lithium-manganese dioxide  
(Li-MnO<sub>2</sub>) Power type  
2/3A-size bobbin cell**

For low drain / long time applications requesting superior voltage response in -40°C~+60°C environments.

#### Cell size references (2/3A)

Electrical characteristics (typical values relative to cells stored for one year or less at +30°C max.)	
Nominal capacity (at 1 mA +20°C 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off).	1.8Ah

Open circuit voltage (at +20°C)	3.0V
---------------------------------	------

Nominal voltage (at 1mA +20°C)	3.0V
--------------------------------	------

Pulse capability: Typically up to 100 mA (100 mA/0.1 second pulses, drained every 2 mn at +20°C from undischarged cells with 10 μA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult pbq)

Max. Continuous current	8mA
Max. Pulse current	100mA

Storage (recommended) (for more severe conditions, consult pbq)	+30°C max
--	-----------

Operating temperature range (Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult pbq)	-40°C / +60°C
--	---------------

#### Physical characteristics

Diameter (max)	17mm(0.45 in)
----------------	---------------


Height (max)	33.5mm(1.33 in)
--------------	-----------------

Typical weight	17g(0.575oz)
----------------	--------------

Available termination suffix	radial tabs, radial pins, axial leads, flying leads
------------------------------	---

## LITHIUM BATTERY

### CR17335SE

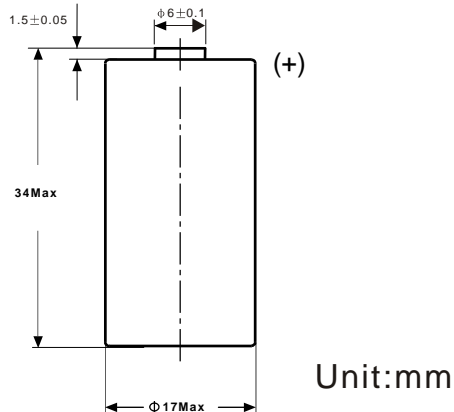

#### Key features

- ▶ High and stable operating voltage
- ▶ Superior drain capability
- ▶ Low self-discharge rate (less than 3% after 1 year of storage at +20°C)
- ▶ Hermetic glass-to-metal sealing
- ▶ Notch technology for safety vent is recommended
- ▶ Stainless steel container

#### Main applications

- ▶ Radiocommunication and other military applications
- ▶ Alarms and security systems
- ▶ Beacons and emergency location transmitters
- ▶ GPS
- ▶ Metering systems
- ▶ Sonobuoys
- ▶ LED lighting applications
- ▶ Others

#### Storage


- ▶ The storage area should be clean, cool (not exceeding +30°C), dry and ventilated.

#### Warning

- ▶ Do not use if the battery casing was mangled.
- ▶ Don't use different models of battery in series.
- ▶ Do not try to recharge.

#### Characteristic curves

##### Discharge performance (25°C)

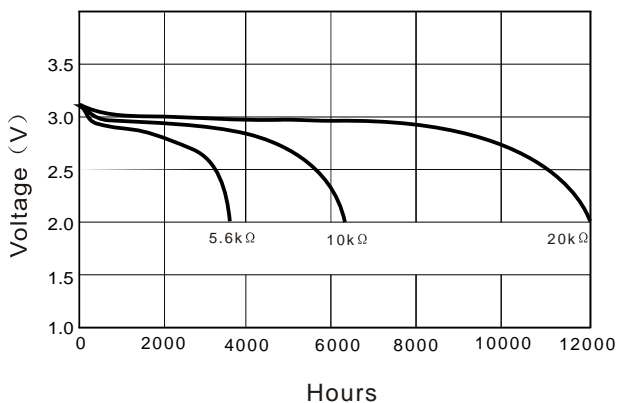

Nominal capacity 1.8Ah (1mA to 2.0V) .